

# MADE TO LONG LAST

Duke's Solar Investment Casting Pumps



Tough Investment Casting Construction


Maximum Operating Efficiency

Fights Sand & Salt

Hygiene



## Group Curve

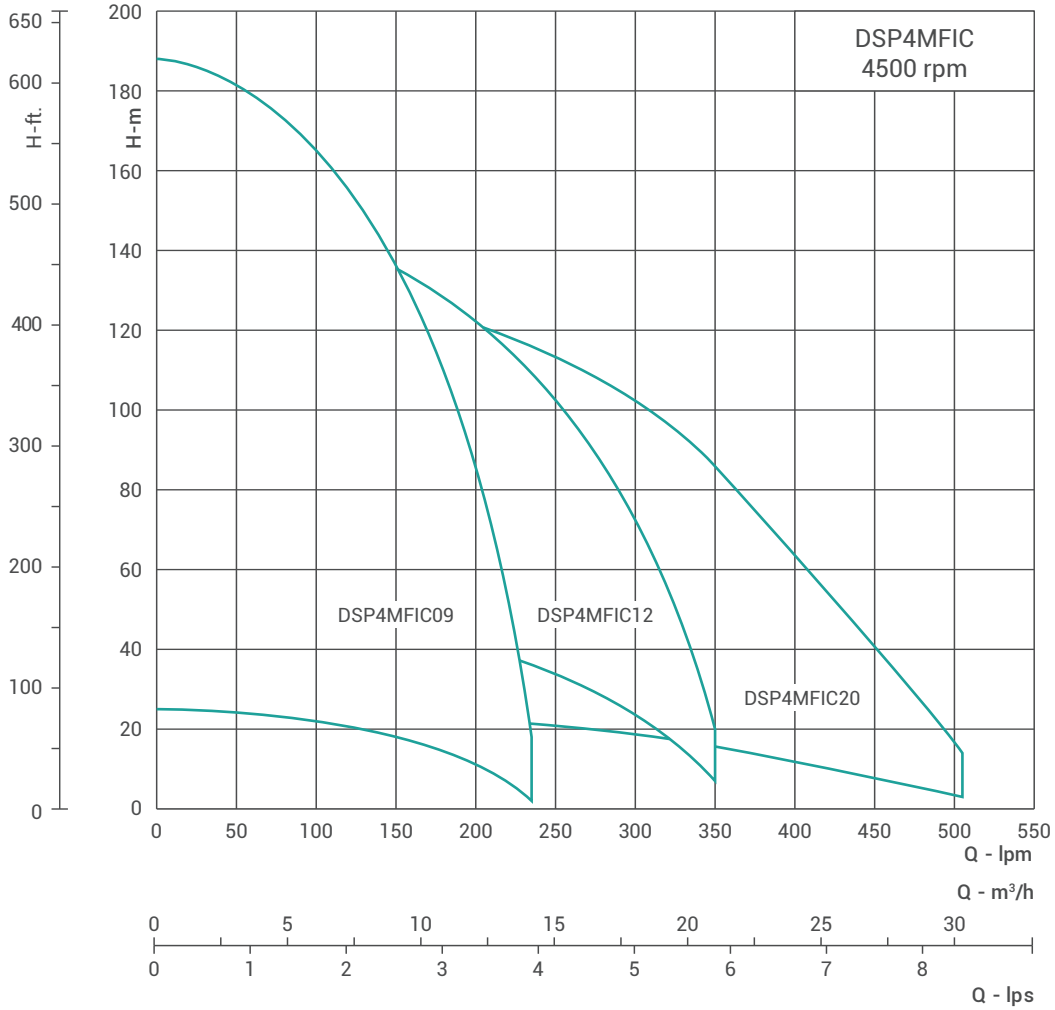

## Technical Specification

Nominal Diameter	4" (100 mm)
Power Range	0.75 - 7.5 kW
	1.0 - 10 HP
Nominal Speed	4500 rpm
Flow Range	6 - 30 m³/h
Shut-off Head	190 m
Outlet sizes	1.25"
Shaft Coupling	Splines
Mounting Standard	NEMA
Max. Operating Pressure	20 bar

## Operating Range

Nominal Flow	m³/h	9	12	20
Flow Range	m³/h	06 - 14	08 - 21	11 - 30
Shut-off head	m	188	150	138

DEF-SR-2I-F22-E1